

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

## STYROPLAST EPS INSULATION

STYROPLAST OY



## GENERAL INFORMATION

### MANUFACTURER INFORMATION

<b>Manufacturer</b>	Styroplast Oy
<b>Address</b>	Styroplast OY, Teollisuustie 1, 37600 Valkeakoski, Finland
<b>Contact details</b>	Timo Huuhtanen, CEO, <a href="mailto:timo.huuhtanen@styroplast.fi">timo.huuhtanen@styroplast.fi</a>
<b>Website</b>	<a href="http://www.styroplast.fi">www.styroplast.fi</a>

### PRODUCT IDENTIFICATION

<b>Product name</b>	Styroplast EPS-insulation
<b>Place(s) of production</b>	Valkeakoski, Finland

Jessica Karhu

RTS EPD Committee secretary

Laura Apilo

Managing Director

### EPD INFORMATION

EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

<b>EPD program operator</b>	The Building Information Foundation RTS sr / Building Information Ltd Malminkatu 16 A, 00100 Helsinki, Finland <a href="http://cer.rts.fi">http://cer.rts.fi</a>
<b>EPD standards</b>	This EPD is in accordance with EN 15804 +A1, +A2 and ISO 14025 standards.
<b>Product category rules (PCR)</b>	The CEN standard EN 15804+A2 serves as the core PCR. In addition, the RTS PCR (English version, 26.8.2020) is used.
<b>EPD author</b>	Ipek Goktas, at Bionova Ltd Suvilahdenkatu 10 B 00500 Helsinki, Finland <a href="http://www.bionova.fi">www.bionova.fi</a>
<b>EPD verification</b>	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
<b>EPD verifier</b>	Silvia Vilčeková, Silcert, s.r.o.
<b>Verification date</b>	7.4.2021
<b>EPD number</b>	RTS_114_21
<b>Publishing date</b>	22.4.2021
<b>EPD valid until</b>	7.4.2026

## PRODUCT INFORMATION

### PRODUCT DESCRIPTION

Styroplast's EPS is expanded polystyrene insulation, which is light weight and effective. EPS insulation is mostly used for as floor, wall, roof and ground frost insulation in building.

### PRODUCT APPLICATION

Styroplast EPS thermal insulation boards are used for insulating floors, walls, ceilings and as ground frost insulation.

### TECHNICAL SPECIFICATIONS

EPS insulation boards have a thermal conductivity of 0.031-0.036 W/(mK). The normal boards are available in nominal densities of 15, 17, 21 and 23 kg/m<sup>3</sup>, and thicknesses ranging from 20 and 1000 mm. As the product is homogeneous, the results represent all available thicknesses. The panels are used for heat insulation of floors, walls and roofs.

### PRODUCT STANDARDS

EN 13163:2015 Thermal insulation products for buildings. Factory made expanded polystyrene (EPS) products.

### PHYSICAL PROPERTIES OF THE PRODUCT

Detailed physical information can be found from the manufacturer's webpage (<https://www.styroplast.fi>).

## ADDITIONAL TECHNICAL INFORMATION

Further information can be found at [www.styroplast.fi](http://www.styroplast.fi).

### PRODUCT RAW MATERIAL COMPOSITION

Material	Weight, kg
Polystyrene	1.00

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	-	-
Minerals	-	-
Fossil materials	100	Europe
Bio-based materials	-	-

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

# PRODUCT LIFE CYCLE

## MANUFACTURING AND PACKAGING (A1-A3)

The raw material expandable polystyrene already includes blowing agent pentane. This raw material is expanded with heat/steam and after that those expanded EPS balls are stored for a while. Then EPS balls are put in to mould (shape or block) and there with steam “glued” together. Styroplast EPS boards are produced with shape mould machine. If production is done with block mould then after while blocks are cut with hotwire to right dimensions.

The Styroplast EPS product is produced in Finland and grid mix energy is used. During the production the generated product-based waste is sent back to the melting process, therefore there is no waste from the product itself. The only generated waste derives from the packaging of the raw materials. Also, most of the pentane which were already included in the raw materials releases during the production.

As packaging material plastic film is used for the final product.

### Manufacturing flow chart



## TRANSPORT AND INSTALLATION (A4-A5)

Annual export rates are taken into consideration for delivery scenario. There is no significant weight loss due to the emission of the rest of the pentane in the product during transportation.

This EPD does not cover installation (Module A5). Air, soil and water impacts during installation have not been studied.

## PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover use phase. Air, soil and water impacts during the use phase have not been studied. During the service life of the product, rest of the pentane is emitted, however it does not have any harmful impact; therefore, it is not taken into consideration.

## PRODUCT END OF LIFE (C1-C4, D)

The rest of the pentane is assumed to be emitted during the service life of the product; therefore, the mass loss due to this blowing agent is taken into consideration in end-of-life stage. Consumption of energy and natural resources in demolition process assumed to be negligible. (C1) The distance for transportation to disposal is assumed as 50 km and the transportation method is assumed to be lorry. (C2) The environmental impacts are zero since the product is considered to be landfill waste without reuse, recovery or recycling. (C3) The product is assumed to be 100% landfilled. (C4) Since the product is only disposed, there are no benefits deriving from the reuse or recycling of the product after its end-of-life stage, and neither any energy recovery from incinerating the packaging materials. (D)

# LIFE CYCLE ASSESSMENT

## LIFE CYCLE ASSESSMENT INFORMATION

Period for data year 2019

## DECLARED AND FUNCTIONAL UNIT

Declared unit 1 kg (produced EPS)

Mass per declared unit 1 kg

## BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C 0

Biogenic carbon content in packaging, kg C 0

## SYSTEM BOUNDARY

The scope of the EPD is "cradle to gate with modules A4, C1-C4 and D". The modules A1 (Raw material supply), A2 (Transport) and A3 (Manufacturing), A4 (Transport) as well as C1 (Deconstruction/demolition), C2 (Transport at end-of-life), C3 (Waste processing), C4 (Disposal) and D (benefits and loads beyond the system boundary) are included in the study.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries			
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	D	D	
X	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x	x	x	
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Operational	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND.

## CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the *EN 15804A1:2012+A2:2019* and *RTS PCR*. The study does not exclude any hazardous materials or substances.

The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes which data are available for are included in the calculation. There is no neglected unit process more than 1% of total mass and energy flows. The total neglected input and output flows do also not exceed 5% of energy usage or mass. The life cycle analysis includes all industrial processes from raw material acquisition to production, distribution, and end-of-life stages.

The modules A5, B1-B7 have not been calculated nor included in the LCA calculations.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy, and water use related to company management and sales activities are excluded.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is based on annual production rate and made with high accuracy and precision. The values for 1 kg of the produced product which is used within this study are calculated by considering the total product weight per annual production. The product output is fixed to 1 kg and the corresponding amount of product is used in the calculations.

In the production plants, several kinds of products are produced; since the production processes of these products are similar, the annual production percentages are taken into consideration for allocation. According to the ratio of the annual production of the declared product to the total annual production at the factory, the annual total energy consumption, packaging materials and the generated waste per the declared product are allocated. Subsequently, the produced product output fixed to 1 kg and the corresponding amount of product is used in the calculations.

This LCA study is conducted in accordance with all methodological considerations, such as performance, system boundaries, data quality, allocation procedures, and decision rules to evaluate inputs and outputs. All estimations and assumptions are given below.

- Module A2, A4 & C2: Vehicle capacity utilization volume factor is assumed to be 1 which means full load. In reality it may vary but as the role of transportation emission in total results is small and so the variety in load assumed to be negligible. Empty returns are not taken into account as it is assumed that return trip is used by transportation companies to serve the needs of other clients.
- Module A4: Transportation doesn't cause losses as products are packaged properly. Additionally, it is assumed that there is no significant weight loss due to the emission of the rest of the

blowing agent in the product during transportation. Also, volume capacity utilisation factor is assumed to be 1 for the nested packaged products. Additionally, transportation distances and vehicle types are assumed according to the exports in the last year.

- Module C1: The impacts of the disassembly stage are assumed zero, since the consumption of energy and natural resources for disassembling the end-of-life product is negligible.
- Module C2: Transportation distance to the closest disposal area is estimated as 50 km and the transportation method is assumed as lorry which is the most common.
- Module C3, C4, D: The end-of-life product is assumed to be 100% landfilled without reuse, recovery or recycling as per a conservative scenario. Hence, there is no benefit from the reusing, recycling or recovery.

## AVERAGES AND VARIABILITY

Since there is only one production plant, there is no average result.

# ENVIRONMENTAL IMPACT DATA

The LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Note: “ENVIRONMENTAL IMPACTS - EN 15804+A1, CML / ISO 21930” and “ENVIRONMENTAL IMPACTS - TRACI 2.1” are presented in ANNEX-1 and ANNEX-2 respectively.

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Climate change – total	kg CO <sub>2</sub> e	3.95E+00	1.22E-01	9.11E-02	4.17E+00	9.13E-03	MND	MND	0.00E+00	6.27E-03	0.00E+00	1.53E-01	0.00E+00
Climate change – fossil	kg CO <sub>2</sub> e	3.92E+00	1.22E-01	8.82E-02	4.13E+00	9.21E-03	MND	MND	0.00E+00	6.27E-03	0.00E+00	1.53E-01	0.00E+00
Climate change – biogenic	kg CO <sub>2</sub> e	3.23E-02	3.39E-06	2.02E-03	3.44E-02	2.61E-07	MND	MND	0.00E+00	-9.32E-07	0.00E+00	9.47E-05	0.00E+00
Climate change – LULUC	kg CO <sub>2</sub> e	7.94E-06	3.68E-05	8.26E-04	8.70E-04	2.77E-06	MND	MND	0.00E+00	2.21E-06	0.00E+00	5.72E-06	0.00E+00
Ozone depletion	kg CFC11e	4.30E-08	2.87E-08	1.46E-08	8.63E-08	2.16E-09	MND	MND	0.00E+00	1.44E-09	0.00E+00	3.23E-09	0.00E+00
Acidification	mol H <sup>+</sup> e	1.34E-02	2.87E-04	1.17E-03	1.49E-02	2.16E-05	MND	MND	0.00E+00	1.47E-05	0.00E+00	4.85E-05	0.00E+00
Eutrophication, aquatic freshwater	kg PO <sub>4</sub> e	1.19E-04	8.72E-06	4.63E-05	1.74E-04	6.56E-07	MND	MND	0.00E+00	4.78E-07	0.00E+00	1.77E-06	0.00E+00
Eutrophication, aquatic marine	kg Ne	2.04E-03	4.11E-05	3.23E-04	2.41E-03	3.09E-06	MND	MND	0.00E+00	2.06E-06	0.00E+00	6.69E-04	0.00E+00
Eutrophication, terrestrial	mol Ne	2.18E-02	4.39E-04	4.99E-03	2.72E-02	3.30E-05	MND	MND	0.00E+00	2.19E-05	0.00E+00	1.01E-04	0.00E+00
Photochemical ozone formation	kg NMVOCe	1.15E-02	2.42E-04	9.76E-04	1.27E-02	1.82E-05	MND	MND	0.00E+00	1.14E-05	0.00E+00	7.28E-05	0.00E+00
Abiotic depletion, minerals & metals	kg Sbe	5.42E-07	2.09E-06	9.95E-07	3.63E-06	1.57E-07	MND	MND	0.00E+00	1.57E-07	0.00E+00	1.12E-07	0.00E+00
Abiotic depletion of fossil resources	MJ	8.71E+01	1.88E+00	1.68E+00	9.07E+01	1.42E-01	MND	MND	0.00E+00	9.46E-02	0.00E+00	2.51E-01	0.00E+00
Water use	m <sup>3</sup> e deprived	4.39E+00	1.46E+00	8.70E+01	9.29E+01	1.10E-01	MND	MND	0.00E+00	8.92E-02	0.00E+00	1.34E-01	0.00E+00

*MND abbreviation stands for Module Not Declared.*

EN 15804+A2 disclaimer for Abiotic depletion and Water use indicators and all optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

Reading Example: 1.00E-03 = 1.00 × 10<sup>-3</sup> = 0.001  
 1.00E+03 = 1.00 × 10<sup>+3</sup> = 1000

## ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1.23E-07	1.05E-08	1.45E-08	1.48E-07	7.93E-10	MND	MND	0.00E+00	4.59E-10	0.00E+00	1.63E-09	0.00E+00
Ionizing radiation, human health	kBq U235e	1.02E-03	9.69E-03	6.84E-02	7.91E-02	7.29E-04	MND	MND	0.00E+00	4.94E-04	0.00E+00	1.19E-03	0.00E+00
Eco-toxicity (freshwater)	CTUe	1.12E-01	8.01E-02	4.54E-02	2.37E-01	6.03E-03	MND	MND	0.00E+00	3.46E-03	0.00E+00	5.79E-03	0.00E+00
Human toxicity, cancer effects	CTUh	5.79E-10	3.44E-11	1.65E-10	7.78E-10	2.59E-12	MND	MND	0.00E+00	1.95E-12	0.00E+00	6.90E-12	0.00E+00
Human toxicity, non-cancer effects	CTUh	1.28E-08	2.30E-09	8.76E-09	2.38E-08	1.73E-10	MND	MND	0.00E+00	1.23E-10	0.00E+00	3.46E-10	0.00E+00
Land use related impacts/soil quality	-	6.14E-02	2.84E+00	2.73E-01	3.17E+00	2.14E-01	MND	MND	0.00E+00	1.05E-01	0.00E+00	8.71E-01	0.00E+00

EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some.

## USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Renewable PER used as energy	MJ	4.50E-01	2.39E-02	8.25E+00	8.72E+00	1.80E-03	MND	MND	0.00E+00	1.36E-03	0.00E+00	4.47E-03	0.00E+00
Renewable PER used as materials	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of renewable PER	MJ	4.50E-01	2.39E-02	8.25E+00	8.72E+00	1.80E-03	MND	MND	0.00E+00	1.36E-03	0.00E+00	4.47E-03	0.00E+00
Non-renewable PER used as energy	MJ	4.04E+01	1.92E+00	1.98E+00	4.43E+01	1.44E-01	MND	MND	0.00E+00	9.66E-02	0.00E+00	2.57E-01	0.00E+00
Non-renewable PER used as materials	MJ	5.06E+01	0.00E+00	6.21E-01	5.12E+01	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of non-renewable PER	MJ	9.10E+01	1.92E+00	2.61E+00	9.55E+01	1.44E-01	MND	MND	0.00E+00	9.66E-02	0.00E+00	2.57E-01	0.00E+00
Use of secondary materials	kg	0.00E+00	0.00E+00	2.03E-04	2.03E-04	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m <sup>3</sup>	5.81E-03	3.96E-04	5.91E-04	6.79E-03	2.98E-05	MND	MND	0.00E+00	1.81E-05	0.00E+00	2.77E-04	0.00E+00

PER abbreviation stands for primary energy resources.



## END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Hazardous waste	kg	5.98E-02	1.85E-03	1.60E-02	7.77E-02	1.39E-04	MND	MND	0.00E+00	9.96E-05	0.00E+00	4.61E-04	0.00E+00
Non-hazardous waste	kg	1.08E-01	2.04E-01	1.08E-01	4.20E-01	1.54E-02	MND	MND	0.00E+00	8.28E-03	0.00E+00	9.95E-01	0.00E+00
Radioactive waste	kg	5.68E-07	1.31E-05	1.62E-05	2.98E-05	9.83E-07	MND	MND	0.00E+00	6.54E-07	0.00E+00	1.48E-06	0.00E+00

## END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

## KEY INFORMATION TABLE (RTS) – KEY INFORMATION PER KG OF PRODUCT

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Climate change – total	kg CO <sub>2</sub> e	3.95E+00	1.22E-01	9.11E-02	4.17E+00	9.21E-03	MND	MND	0.00E+00	6.27E-03	0.00E+00	1.53E-01	0.00E+00
Abiotic depletion. minerals & metals	kg Sbe	5.42E-07	2.09E-06	9.95E-07	3.63E-06	1.57E-07	MND	MND	0.00E+00	1.57E-07	0.00E+00	1.12E-07	0.00E+00
Abiotic depletion of fossil resources	MJ	8.71E+01	1.88E+00	1.68E+00	9.07E+01	1.42E-01	MND	MND	0.00E+00	9.46E-02	0.00E+00	2.51E-01	0.00E+00
Water use	m <sup>3</sup> e deprived	5.81E-03	3.96E-04	5.91E-04	6.79E-03	2.98E-05	MND	MND	0.00E+00	1.81E-05	0.00E+00	2.77E-04	0.00E+00
Use of secondary materials	kg	0.00E+00	0.00E+00	2.03E-04	2.03E-04	0.00E+00	MND	MND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Biogenic carbon content in product	kg C	N/A	N/A	0.00E+00	0.00E+00	N/A	MND	MND	N/A	N/A	N/A	N/A	N/A
Biogenic carbon content in packaging	kg C	N/A	N/A	0.00E+00	0.00E+00	N/A	MND	MND	N/A	N/A	N/A	N/A	N/A

## SCENARIO DOCUMENTATION

### Manufacturing energy scenario documentation

Scenario parameter	Value
Electricity data source and quality	Ecoinvent v3.6 is used as a background data. Electricity emissions have been calculated on the basis of the average distribution
Electricity CO2e / kWh	0.0579 kg CO2e / kWh
District heating data source and quality	Ecoinvent v3.6 is used as a background data. District heating emissions have been calculated on the basis of the average resource use
District heating CO2e / kWh	0.0031 kg CO2e / kWh

### Transport scenario documentation

Scenario parameter	Value
A4 specific transport CO2e emissions, kg CO2e / tkm	0.0901
A4 average transport distance, km	100

### End of life scenario documentation

Scenario parameter	Value
Collection process – kg collected separately	0.9843
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	0
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	0.9843
Scenario assumptions for transportation	End-of-life product is transported 50 km with an average lorry

## BIBLIOGRAPHY

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations. Principles and procedures.

ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.

ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.

Ecoinvent database v3.6

EN 15804:2012+A2:2019 Sustainability in construction works - Environmental product declarations - Core rules for the product category of construction products.


RTS PCR 26.8.2020 RTS PCR protocol: EPDs published by the Building Information Foundation RTS sr. (English version)

## ANNEX-1: ENVIRONMENTAL IMPACTS - EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Global warming potential	kg CO <sub>2</sub> e	3.48E+00	1.21E-01	8.61E-02	3.68E+00	9.13E-03	MND	MND	0.00E+00	6.22E-03	0.00E+00	1.08E-01	0.00E+00
Depletion of stratospheric ozone	kg CFC11e	4.40E-08	2.29E-08	1.60E-08	8.29E-08	1.72E-09	MND	MND	0.00E+00	1.14E-09	0.00E+00	2.58E-09	0.00E+00
Acidification	kg SO <sub>2</sub> e	1.15E-02	2.49E-04	7.99E-04	1.25E-02	1.87E-05	MND	MND	0.00E+00	1.28E-05	0.00E+00	1.33E-04	0.00E+00
Eutrophication	kg (PO <sub>4</sub> ) <sup>3</sup> e	1.20E-03	5.03E-05	3.21E-04	1.57E-03	3.78E-06	MND	MND	0.00E+00	2.66E-06	0.00E+00	5.51E-03	0.00E+00
Photochemical ozone formation	kg C <sub>2</sub> H <sub>4</sub> e	7.04E-04	1.58E-05	4.37E-05	7.64E-04	1.19E-06	MND	MND	0.00E+00	8.26E-07	0.00E+00	2.25E-05	0.00E+00
Abiotic depletion of non-fossil resources	kg Sbe	5.42E-07	2.09E-06	9.95E-07	3.63E-06	1.57E-07	MND	MND	0.00E+00	1.57E-07	0.00E+00	1.12E-07	0.00E+00
Abiotic depletion of fossil resources	MJ	8.71E+01	1.88E+00	1.68E+00	9.07E+01	1.42E-01	MND	MND	0.00E+00	9.46E-02	0.00E+00	2.51E-01	0.00E+00

## ANNEX-2: ENVIRONMENTAL IMPACTS - TRACI 2.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Global warming potential	kg CO <sub>2</sub> e	3.54E+00	1.21E-01	8.62E-02	3.74E+00	9.11E-03	MND	MND	0.00E+00	6.21E-03	0.00E+00	1.15E-01	0.00E+00
Ozone depletion	kg CFC11e	6.19E-08	3.05E-08	1.95E-08	1.12E-07	2.29E-09	MND	MND	0.00E+00	1.52E-09	0.00E+00	3.44E-09	0.00E+00
Photochemical smog formation	kg O <sub>3</sub> e	1.10E-02	2.35E-04	9.52E-04	1.22E-02	1.77E-05	MND	MND	0.00E+00	1.20E-05	0.00E+00	4.13E-05	0.00E+00
Acidification	kg SO <sub>2</sub> e	1.57E-03	1.10E-04	3.67E-04	2.05E-03	8.31E-06	MND	MND	0.00E+00	5.87E-06	0.00E+00	1.54E-02	0.00E+00
Eutrophication	kg Ne	1.27E-01	2.47E-03	1.95E-02	1.49E-01	1.86E-04	MND	MND	0.00E+00	1.23E-04	0.00E+00	5.70E-04	0.00E+00
Depletion of non-renewable energy	MJ	1.27E+01	2.72E-01	2.05E-01	1.32E+01	2.05E-02	MND	MND	0.00E+00	1.36E-02	0.00E+00	3.38E-02	0.00E+00

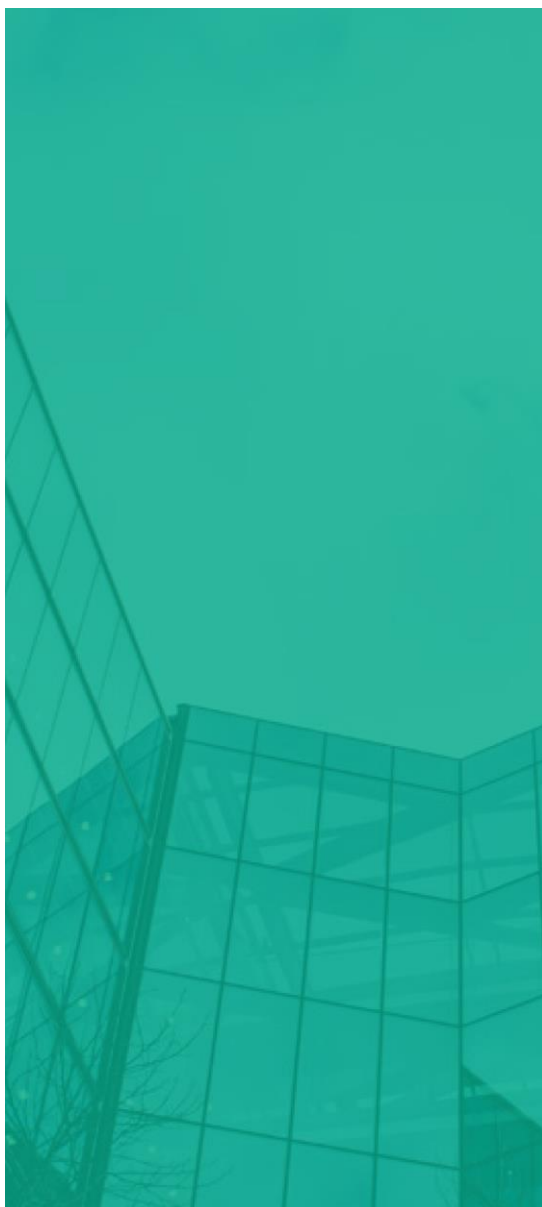

## ABOUT THE MANUFACTURER

As part of the Finnfoam Group, in January 2018, Styroplast Oy was transferred to the ownership of Finnfoam Oy in Salo. Over nearly forty-year-long history, Finnfoam has become one of the leading manufacturers of plastic-based thermal insulation solutions. The roots of our thermal insulation competence are embedded into the frozen Finnish soil. Today, the group is known for quality, product development, and reliability. Finnfoam's product range includes XPS, EPS and PIR thermal insulation and the Tulppa - wet room boards. The entire Finnfoam (XPS) thermal insulation product range is suitable for use as frost insulation and for insulating floors, ceilings, and walls, as well as for various types of supplementary thermal insulation. As frost and floor insulation, Finnfoam is highly resistant to moisture, freezing, and load. FF-EPS is best suited for use as thermal insulation for walls and ceilings, where it provides a safe and highly cost-effective solution. It can also be used in floors that are not subjected to significant loads. The applications of FF-PIR polyurethane insulation products include the thermal insulation of walls and ceilings as well as saunas. FF-PIR insulation products have a very high thermal insulation capacity, which allows for lower structural thickness.

## EPD AUTHOR AND CONTRIBUTORS

<b>Manufacturer</b>	Styroplast Oy
<b>EPD author</b>	Bionova Ltd, <a href="http://www.bionova.fi">www.bionova.fi</a>
<b>EPD verifier</b>	Silvia Vilčeková, Silcert, s.r.o.
<b>EPD program</b>	RTS EPD
<b>Background data</b>	This EPD is based on Ecoinvent 3.6 (cut-off)
<b>LCA software</b>	One Click LCA Pre-Verified Generator for Plastic Products