

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with EN 15804+A2 & ISO 14025 / ISO 21930

## Solid hardwood boards and solid softwood boards



# General Information

## MANUFACTURER INFORMATION

<b>MANUFACTURER</b>	WIMEX A/S
<b>ADDRESS</b>	Strandvejen 16 DK-7800 Skive Denmark
<b>CONTACT DETAILS</b>	info@wimex.dk
<b>WEBSITE</b>	www.wimex.dk

## PRODUCT IDENTIFICATION

<b>PRODUCT NAME</b>	Solid hardwood boards and solid softwood boards
<b>PLACE(S) OF PRODUCTION</b>	Estonia (2 locations)

### The building information Foundation RTS sr

EPDs within the same product category but from different programmes may not be comparable.

Jukka Soppanon  
RTS EPD Committee Secretary

Laura Apilo  
Managing Director

## EPD INFORMATION

The EPD owner has the sole ownership, liability, and responsibility for the EPD. Construction products EPDs may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

<b>EPD PROGRAM OPERATOR</b>	The Building Information Foundation RTS sr
<b>EPD STANDARDS</b>	This EPD is in accordance with EN 15804+A2 and ISO 14025 standards.
<b>PRODUCT CATEGORY RULES</b>	The CEN standard EN 15804 serves as the core PCR. In addition, the RTS PCR (English version, 26.8.2020) is used.
<b>EPD AUTHOR</b>	Mari Kirss Rangi Maja OÜ www.lcasupport.com
<b>EPD VERIFICATION</b>	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
<b>VERIFICATION DATE</b>	28 November 2022
<b>EPD VERIFIER</b>	Sigita Židonienė Vesta Consulting UAB www.vestaconsulting.lt
<b>EPD NUMBER</b>	RTS_207_23
<b>PUBLISHING DATE</b>	5 December 2022
<b>EPD VALID UNTIL</b>	5 December 2027

# Product Information

## PRODUCT DESCRIPTION

Wimex timber boards without additional treatment. No added chemicals or enhancement technologies have been applied. Timber has been cut to size, moulded into profile and the defects have been cut off.

## PRODUCT APPLICATION

Wimex boards without treatment are to be used indoors for wall cladding or as interior material for saunas.

## TECHNICAL SPECIFICATIONS

Solid timber from various species. Heartwood, sapwood and knots may be present in the final board.

## PRODUCT STANDARDS

EN 14915:2013 + A2:2020

## PHYSICAL PROPERTIES OF THE PRODUCT

Product measurements vary: thickness 7-42 mm, width 18-210 mm, length 0.2-6 m, density 440-700 kg/m<sup>3</sup>. Average moisture content is 12%.

## ADDITIONAL TECHNICAL INFORMATION

Further information can be found at [www.wimex.dk](http://www.wimex.dk).

## PRODUCT RAW MATERIAL MAIN COMPOSITION

RAW MATERIAL CATEGORY	AMOUNT, MASS-%	MATERIAL ORIGIN
METALS	0	
MINERALS	0	
FOSSIL MATERIALS	0	
BIO-BASED MATERIALS	100	Global

Hardwood boards are made mostly from non-certified material (2% certified) and softwood boards mostly from FSC-certified materials (85% certified).

## SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0.1% (1000 ppm).

# Product Life-Cycle

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

This EPD covers two manufacturing locations in Estonia.

## TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

On average, the final product is transported 320 km by a lorry.

Installation impacts include provision of all materials, products and energy, as well as waste processing up to end-of-

waste state or disposal of final residues during the construction process stage. Fasteners have been excluded as cut-off has been applied. In addition, most of our products can be ordered with matched tongue-and-groove ends. Matched tongue-and-groove ends allow boards of different lengths to be installed without the need to rest them on joists.

## PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase.

Air, soil, and water impacts during the use phase have not been studied.


## PRODUCT END OF LIFE (C1-C4, D)

At the end-of-life, in the demolition phase, 70% of the waste is assumed to be collected as separate wood waste and 30% as mixed construction waste (C1). 97% of the sorted end-of-life product is assumed to be sent to the closest facilities (C2) and 3% of the sorted end-of-life product and 100% of the mixed construction waste is landfilled or incinerated without energy recovery (C4). EOL scenarios have been based on EU data.

# Manufacturing Process

The manufacturing process starts with the arrival of the raw materials. The timber is cut to size, moulded into profile and the defects are cut off. The final product is packaged and labelled.

Some of the wood waste generated during the manufacturing process is used to power the wood drying kilns, generate heat or is repurposed as packaging material.



# Life-Cycle Assessment


## LIFE-CYCLE ASSESSMENT INFORMATION

PERIOD FOR DATA	2021
DECLARED UNIT	1 m <sup>3</sup>
MASS PER DECLARED UNIT	
SOLID HARDWOOD BOARDS	554 kg
SOLID SOFTWOOD BOARDS	454 kg

## BIOGENIC CARBON CONTENT AT FACTORY GATE

BIOGENIC CARBON CONTENT IN PRODUCT	
SOLID HARDWOOD BOARDS	257 kg
SOLID SOFTWOOD BOARDS	210 kg
BIOGENIC CARBON CONTENT IN PACKAGING	
SOLID HARDWOOD BOARDS	3 kg
SOLID SOFTWOOD BOARDS	3 kg

**SYSTEM BOUNDARY**

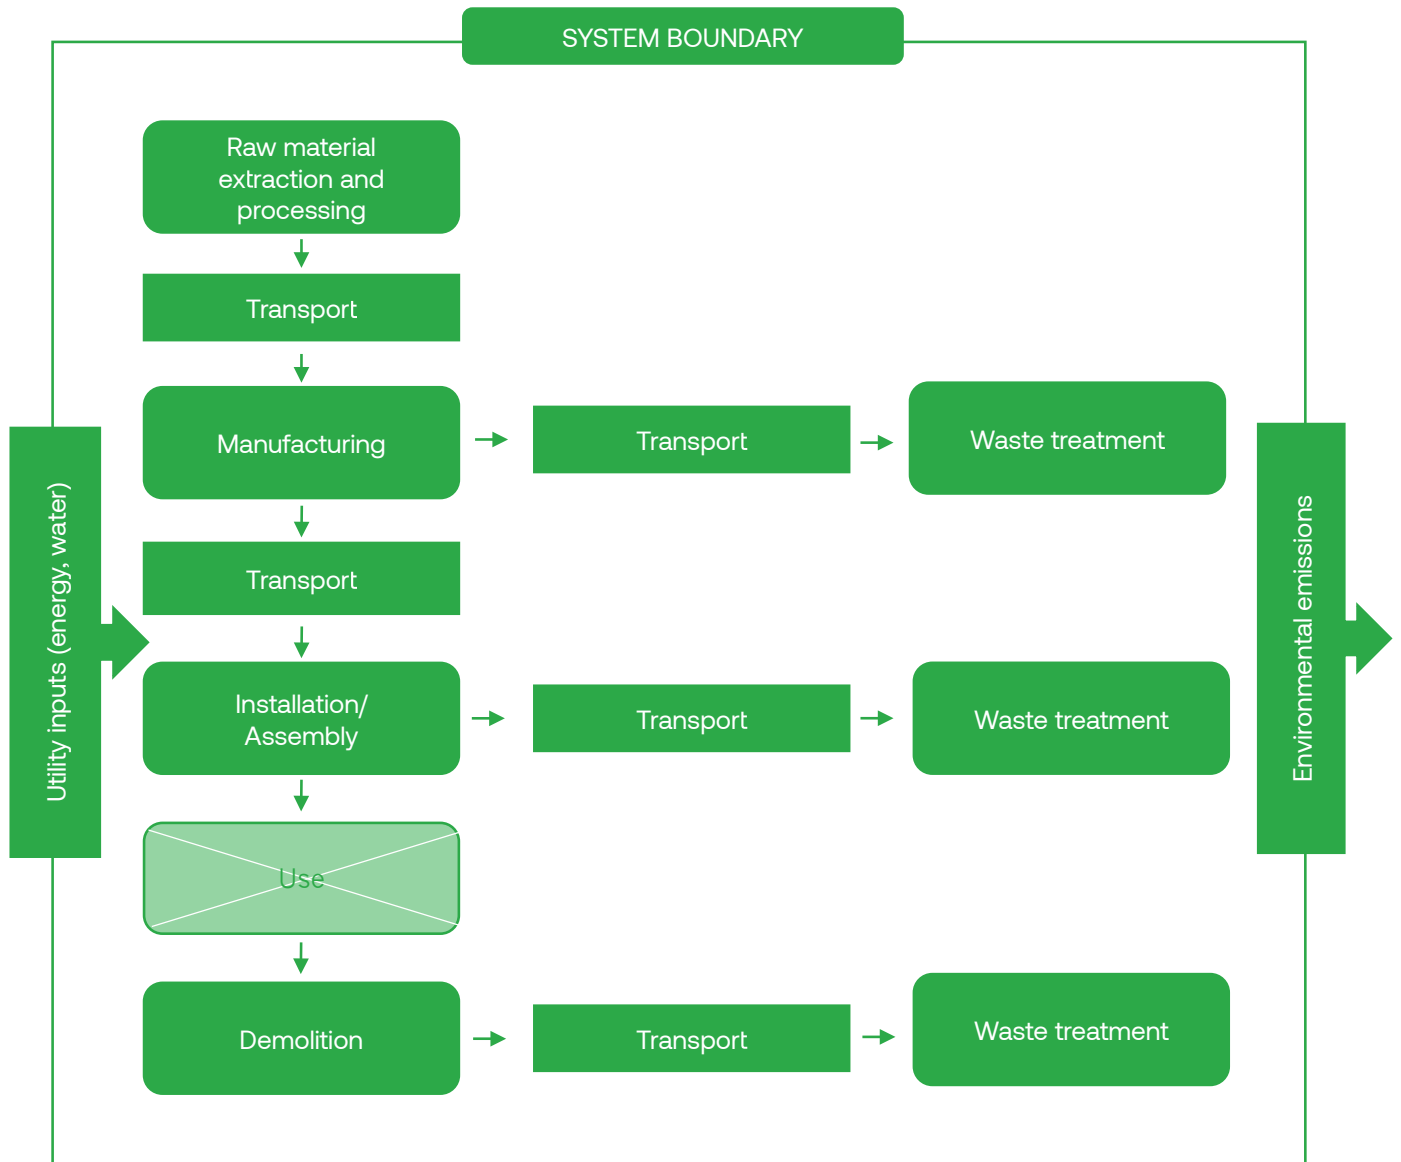

This EPD covers cradle to gate with options, modules C1–C4 and module D scope with the following modules; A1 (Raw material supply), A2 (Transport) and A3 (Manufacturing), A4 (Transport), A5 (Assembly) as well as C1 (Deconstruction),

C2 (Transport at end-of-life), C3 (Waste processing) and C4 (Disposal). In addition, module D - benefits and loads beyond the system boundary is included.

PRODUCT STAGE			ASSEMBLY STAGE		USE STAGE							END OF LIFE STAGE				BEYOND THE SYSTEM BOUNDARIES		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	D	D
x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x	x	x
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

## CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the EN 15804:2012+A2:2019 and the applied PCR. The study does not exclude any hazardous materials or substances.

The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

Cut off has only been applied in A5 to exclude fasteners.

## ALLOCATION

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation.

In this study, as per EN 15804, allocation is conducted in the following order;

1. Allocation should be avoided.
2. Allocation should be based on physical properties (e.g. mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

Module A1 includes allocation for co-products. Allocation has been done based on economic values as the revenue of Products and co-products differs greatly.

Allocation used in Ecoinvent 3.6 environmental data sources follows the methodology 'allocation, cut-off by classification'. This methodology is in line with the requirements of EN 15804.

## ESTIMATES AND ASSUMPTIONS

This LCA study is conducted in accordance with all methodological considerations, such as performance, system boundaries, data quality, allocation procedures, and decision rules to evaluate inputs and outputs. All estimations and assumptions are given below:

- **Module A2, A4 & C2** Vehicle capacity utilization volume factor is assumed to be 1 which means full load. In reality, it may vary but as the role of transportation emissions in total results is small and so the variety in load is assumed to be negligible. Empty returns are not taken into account as it is assumed that return trip is used by transportation company to serve the needs of other clients.
- **Module A3** Waste wood used for powering the wood drying kilns and heating system was allocated based on share of wet wood used. All other energy use and waste generated was allocated based on production volume.

- **Module A4** The transportation distance is defined according to RTS PCR. The typical installation place was assumed as an average option – 320 km by lorry. According to the manufacturer, transportation doesn't cause losses as products are packaged properly. Also, volume capacity utilisation factor is assumed to be 1 for the nested packaged products.

- **Module A5** No fuels or energy is needed for installation.

- **Module C1** Consumption of energy and natural resources in demolition process are assumed to be negligible. It is assumed that 100% of the waste is collected.

- **Module C2** It is estimated that there is no mass loss during the use of the product, therefore the end-of-life product is assumed to have the same weight with the declared product. All of the end-of-life product is assumed to be collected as sorted wood waste or mixed construction waste and sent to the closest facilities such as recycling and landfill. Transportation distance to the closest disposal area is estimated as 250 km and the transportation method is assumed as lorry which is the most common option.

- **Module C3** 97% of the sorted wood waste is incinerated for energy recovery or recycled, in the ratio of 0.4749 to incineration and 0.4947 to recycling. Losses in the sorting process are assumed to be very small and not considered in the assessment.

- **Module C4** The remaining 3% of the sorted wood waste and 100% of the mixed construction waste are assumed to be sent to landfill or incinerated without energy recovery, in the ratio of 0.3356 to landfilling and 0.6644 to incineration.

- **Module D** Benefits of recyclable waste generated in the Module C3 are considered. It was assumed that the sorted wood waste is incinerated for energy recovery or recycled – for example, used for fibrewood production – in the same ratio as in module C3.

## BIOGENIC CARBON AND GWP-BIOGENIC

Biogenic carbon content in Products and packaging has been calculated according to EN 16449. Irrespective of the chosen allocation for co-products, biogenic carbon content reflects physical flows.

In the ecoinvent database, datasets with multiple products are allocated in the attributional system models, most frequently using price. When products have large difference in value, this leads to an allocation of most of the impacts to the more valuable product and can lead to a discrepancy between the biogenic carbon content of a product and the amount allocated to it based on the life cycle inventory (Ruiz et al, 2021). Therefore, GWP-biogenic values have been recalculated based on EN 16449 and EN 16485:2014. Carbon sequestration and carbon neutrality has only been assumed for sustainable wood (FSC-certified).

# Environmental Impact Data

Note: additional environmental impact data are presented in annexes.

## SOLID HARDWOOD BOARDS

### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2. PEF

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – TOTAL	kg CO <sub>2</sub> e	1.15E2	4.96E2	6.11E2	1.62E1	1.39E1	0E0	7.12E1	9.44E2	6.2E1	4.66E2
GWP – FOSSIL	kg CO <sub>2</sub> e	1.35E2	2.7E1	1.62E2	1.64E1	2.19E0	0E0	7.11E1	3.29E0	6.2E1	-1.08E2
GWP – BIOGENIC	kg CO <sub>2</sub> e	-2.14E1	1.32E1	-8.18E0	1.19E-2	4.37E-3	0E0	3.25E-2	1.45E1	3.29E-3	-3.52E2
GWP – LULUC	kg CO <sub>2</sub> e	1.75E0	4.56E2	4.58E2	4.93E-3	1.17E1	0E0	3.99E-2	9.27E2	1.58E-3	9.26E2
OZONE DEPLETION POT.	kg CFC- <sub>11</sub> e	2.41E-5	1.88E-6	2.6E-5	3.85E-6	2.07E-7	0E0	1.52E-5	2.75E-7	6.18E-7	-1.66E-5
ACIDIFICATION POTENTIAL	mol H <sup>+</sup> e	8.64E-1	2.24E-1	1.09E0	6.88E-2	5.3E-3	0E0	2.8E-1	1.82E-2	4.27E-2	-1.53E-1
EP-FRESHWATER	kg Pe	1.3E-2	2.01E-3	1.5E-2	1.33E-4	1.32E-5	0E0	8.38E-4	3.44E-4	8.61E-5	-2.49E-3
EP-MARINE	kg Ne	2.82E-1	5.78E-2	3.39E-1	2.07E-2	1.75E-3	0E0	7.5E-2	2.44E-3	1.8E-2	-4.69E-2
EP-TERRESTRIAL	mol Ne	3.05E0	8.73E-1	3.92E0	2.29E-1	1.9E-2	0E0	8.33E-1	2.98E-2	1.86E-1	-5.06E-1
POCP (“SMOG”)	kg NMVOCe	1.24E0	1.81E-1	1.42E0	7.36E-2	5.38E-3	0E0	2.6E-1	7.76E-3	4.73E-2	-2.43E-1
ADP-MINERALS & METALS	kg Sbe	3.05E-3	4.14E-4	3.46E-3	2.79E-4	4.67E-5	0E0	3.5E-3	1.28E-5	8.16E-5	-3.87E-4
ADP-FOSSIL RESOURCES	MJ	1.92E3	3.34E2	2.25E3	2.55E2	1.47E1	0E0	1.05E3	6.66E1	5.01E1	-1.79E3
WATER USE	m <sup>3</sup> e depr.	2.03E1	4.7E1	6.73E1	9.47E-1	7.2E-2	0E0	4.36E0	8.31E-1	5.21E0	-1.9E1

1 GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential.  
 2 EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health.  
 The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

## USE OF NATURAL RESOURCES

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
RENEW. PER AS ENERGY	MJ	9.07E3	1.02E3	1.01E4	3.21E0	3.25E-1	0E0	2.26E1	1.12E1	1.4E0	-2.4E3
RENEW. PER AS MATERIAL	MJ	8.2E3	-6.98E2	7.5E3	0E0	-8.53E1	0E0	0E0	-5.03E3	-2.38E3	-5.03E3
TOTAL USE OF RENEW. PER	MJ	1.73E4	3.17E2	1.76E4	3.21E0	-8.5E1	0E0	2.26E1	-5.02E3	-2.38E3	-7.44E3
NON-RE. PER AS ENERGY	MJ	1.92E3	2.23E2	2.14E3	2.55E2	1.47E1	0E0	1.05E3	6.66E1	5.01E1	-1.79E3
NON-RE. PER AS MATERIAL	MJ	0E0	1.11E2	1.11E2	0E0	-1.11E2	0E0	0E0	0E0	0E0	0E0
TOTAL USE OF NON-RE. PER	MJ	1.92E3	3.34E2	2.25E3	2.55E2	-9.62E1	0E0	1.05E3	6.66E1	5.01E1	-1.79E3
SECONDARY MATERIALS	kg	0E0	5.74E-2	5.74E-2	0E0	0E0	0E0	0E0	0E0	0E0	1.92E2
RENEW. SECONDARY FUELS	MJ	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	2.47E3
NON-REN. SECONDARY FUELS	MJ	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0
USE OF NET FRESH WATER	m <sup>3</sup>	9.24E-1	1.02E-1	1.03E0	5.3E-2	7.77E-3	0E0	1.93E-1	2.08E-2	2.06E-1	-4.47E-1

PER = Primary energy resources

**END OF LIFE – WASTE**

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
HAZARDOUS WASTE	kg	5.27E0	1.61E0	6.87E0	2.48E-1	1.38E-1	0E0	1.51E0	0E0	4.31E0	-9.01E-3
NON-HAZARDOUS WASTE	kg	1.85E2	4.6E1	2.31E2	2.74E1	9.42E0	0E0	6.59E1	0E0	1.74E2	1.62E2
RADIOACTIVE WASTE	kg	1.14E-2	9.02E-4	1.23E-2	1.75E-3	9.21E-5	0E0	7E-3	0E0	2.06E-4	-2.04E-3

**END OF LIFE – OUTPUT FLOWS**

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
COMPONENTS FOR RE-USE	kg	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0
MATERIALS FOR RECYCLING	kg	0E0	0E0	0E0	0E0	0E0	0E0	0E0	1.92E2	0E0	0E0
MATERIALS FOR ENERGY REC	kg	0E0	1.7E1	1.7E1	0E0	1.28E1	0E0	0E0	1.84E2	0E0	0E0
EXPORTED ENERGY	MJ	0E0	0E0	0E0	0E0	0E0	0E0	0E0	2.47E3	0E0	0E0

**KEY INFORMATION TABLE (RTS) – KEY INFORMATION PER KG OF PRODUCT**

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – TOTAL	kg CO <sub>2</sub> e	2.08E-1	8.96E-1	1.1E0	2.96E-2	2.51E-2	0E0	1.28E-1	1.7E0	1.12E-1	8.4E-1
ADP-MINERALS & METALS	kg Sbe	5.51E-6	7.47E-7	6.25E-6	5.04E-7	8.43E-8	0E0	6.32E-6	2.3E-8	1.47E-7	-6.99E-7
ADP-FOSSIL	MJ	3.46E0	6.03E-1	4.06E0	4.6E-1	2.66E-2	0E0	1.9E0	1.2E-1	9.04E-2	-3.23E0
WATER USE	m <sup>3</sup> e depr.	3.66E-2	8.49E-2	1.21E-1	1.71E-3	1.3E-4	0E0	7.88E-3	1.5E-3	9.41E-3	-3.44E-2
SECONDARY MATERIALS	kg	0E0	1.04E-4	1.04E-4	0E0	0E0	0E0	0E0	0E0	0E0	1.92E2
BIOG. C IN PRODUCT	kg C	N/A	4.63E-1	4.63E-1	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BIOG. C IN PACKAGING	kg C	N/A	5.77E-3	5.77E-3	N/A	N/A	N/A	N/A	N/A	N/A	N/A

## SOLID SOFTWOOD BOARDS

### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – TOTAL	kg CO <sub>2</sub> e	-9.55E2	5.5E2	-4.06E2	1.33E1	1.21E1	0E0	5.83E1	7.73E2	5.08E1	-2.55E2
GWP – FOSSIL	kg CO <sub>2</sub> e	1.31E2	2.61E1	1.57E2	1.34E1	1.86E0	0E0	5.82E1	2.69E0	5.08E1	-8.68E1
GWP – BIOGENIC	kg CO <sub>2</sub> e	-1.09E3	4.42E2	-6.45E2	9.75E-3	2.53E0	0E0	2.66E-2	6.5E2	9.7E-4	-2.88E2
GWP – LULUC	kg CO <sub>2</sub> e	8.29E-1	8.2E1	8.28E1	4.04E-3	7.71E0	0E0	3.26E-2	1.21E2	1.3E-3	1.21E2
OZONE DEPLETION POT.	kg CFC- <sub>11</sub> e	1.91E-5	1.51E-6	2.06E-5	3.16E-6	1.37E-7	0E0	1.24E-5	2.25E-7	5.06E-7	-1.31E-5
ACIDIFICATION POTENTIAL	mol H+e	9.37E-1	2.16E-1	1.15E0	5.64E-2	3.9E-3	0E0	2.29E-1	1.49E-2	3.5E-2	-1.22E-1
EP-FRESHWATER	kg Pe	8.95E-3	2.12E-3	1.1E-2	1.09E-4	9.31E-6	0E0	6.86E-4	2.81E-4	7.05E-5	-9.08E-4
EP-MARINE	kg Ne	3.05E-1	5.18E-2	3.57E-1	1.7E-2	1.35E-3	0E0	6.14E-2	2E-3	1.47E-2	-3.76E-2
EP-TERRESTRIAL	mol Ne	3.37E0	8.31E-1	4.2E0	1.88E-1	1.46E-2	0E0	6.82E-1	2.44E-2	1.53E-1	-4.16E-1
POCP (“SMOG”)	kg NMVOCe	1.03E0	1.62E-1	1.19E0	6.04E-2	4.04E-3	0E0	2.13E-1	6.35E-3	3.87E-2	-1.48E-1
ADP-MINERALS & METALS	kg Sbe	2.33E-3	3.98E-4	2.73E-3	2.29E-4	1.47E-6	0E0	2.87E-3	1.05E-5	6.68E-5	-2.44E-4
ADP-FOSSIL RESOURCES	MJ	1.79E3	3E2	2.09E3	2.09E2	6.91E-1	0E0	8.61E2	5.45E1	4.1E1	-1.43E3
WATER USE	m <sup>3</sup> e depr.	1.82E1	5.1E1	6.92E1	7.77E-1	6.14E-2	0E0	3.57E0	6.8E-1	4.27E0	-1.45E1

1 GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential.  
 2 EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health.  
 The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

## USE OF NATURAL RESOURCES

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
RENEW. PER AS ENERGY	MJ	6.29E3	1.08E3	7.37E3	2.63E0	2.26E-2	0E0	1.85E1	9.16E0	1.15E0	-1.02E3
RENEW. PER AS MATERIAL	MJ	9.6E3	-3.47E3	6.13E3	0E0	-5.28E1	0E0	0E0	-4.12E3	-1.95E3	-4.12E3
TOTAL USE OF RENEW. PER	MJ	1.59E4	-2.39E3	1.35E4	2.63E0	-5.27E1	0E0	1.85E1	-4.11E3	-1.95E3	-5.14E3
NON-RE. PER AS ENERGY	MJ	1.79E3	1.89E2	1.98E3	2.09E2	6.91E-1	0E0	8.61E2	5.45E1	4.1E1	-1.43E3
NON-RE. PER AS MATERIAL	MJ	0E0	1.11E2	1.11E2	0E0	-1.11E2	0E0	0E0	0E0	0E0	0E0
TOTAL USE OF NON-RE. PER	MJ	1.79E3	3E2	2.09E3	2.09E2	-1.1E2	0E0	8.61E2	5.45E1	4.1E1	-1.43E3
SECONDARY MATERIALS	kg	0E0	1.67E0	1.67E0	0E0	0E0	0E0	0E0	0E0	0E0	1.57E2
RENEW. SECONDARY FUELS	MJ	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	2.02E3
NON-REN. SECONDARY FUELS	MJ	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0
USE OF NET FRESH WATER	m <sup>3</sup>	5.31E-1	7.27E-2	6.04E-1	4.35E-2	3.72E-3	0E0	1.58E-1	1.71E-2	1.69E-1	-2.85E-1

PER = Primary energy resources



### END OF LIFE – WASTE

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
HAZARDOUS WASTE	kg	6.72E0	9.77E-1	7.7E0	2.03E-1	8.4E-2	0E0	1.24E0	0E0	3.53E0	7.44E-4
NON-HAZARDOUS WASTE	kg	1.94E2	2.97E1	2.23E2	2.25E1	2.24E0	0E0	5.4E1	0E0	1.42E2	1.37E2
RADIOACTIVE WASTE	kg	9.41E-3	6.78E-4	1.01E-2	1.43E-3	2.29E-6	0E0	5.73E-3	0E0	1.68E-4	-1.43E-3

### END OF LIFE – OUTPUT FLOWS

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
COMPONENTS FOR RE-USE	kg	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0	0E0
MATERIALS FOR RECYCLING	kg	0E0	0E0	0E0	0E0	0E0	0E0	0E0	1.57E2	0E0	0E0
MATERIALS FOR ENERGY REC	kg	0E0	0E0	0E0	0E0	0E0	0E0	0E0	1.51E2	0E0	0E0
EXPORTED ENERGY	MJ	0E0	0E0	0E0	0E0	0E0	0E0	0E0	2.02E3	0E0	0E0

### KEY INFORMATION TABLE (RTS) – KEY INFORMATION PER KG OF PRODUCT

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – TOTAL	kg CO <sub>2</sub> e	-2.1E0	1.21E0	-8.94E-1	2.96E-2	2.66E-2	0E0	1.28E-1	1.7E0	1.12E-1	-5.61E-1
ADP-MINERALS & METALS	kg Sbe	5.13E-6	9.22E-7	6.05E-6	5.05E-7	6.77E-8	0E0	6.31E-6	2.3E-8	1.47E-7	-5.36E-7
ADP-FOSSIL	MJ	3.94E0	6.82E-1	4.62E0	4.6E-1	2.18E-2	0E0	1.9E0	1.2E-1	9.03E-2	-3.16E0
WATER USE	m <sup>3</sup> e depr.	4.01E-2	1.12E-1	1.52E-1	1.71E-3	1.35E-4	0E0	7.87E-3	1.5E-3	9.4E-3	-3.2E-2
SECONDARY MATERIALS	kg	0E0	3.67E-3	3.67E-3	0E0	0E0	0E0	0E0	0E0	0E0	1.57E2
BIOG. C IN PRODUCT	kg C	N/A	4.63E-1	4.63E-1	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BIOG. C IN PACKAGING	kg C	N/A	6.15E-3	6.15E-3	N/A	N/A	N/A	N/A	N/A	N/A	N/A

## SCENARIO DOCUMENTATION

### Manufacturing energy scenario documentation

SCENARIO PARAMETER	VALUE
ELECTRICITY DATA SOURCE AND QUALITY	Modelled electricity based on Estonian renewable energy production mix for 2020-2021
ELECTRICITY CO <sub>2</sub> E / KWH	0.04

### Transport scenario documentation (A4)

SCENARIO PARAMETER	VALUE
SPECIFIC TRANSPORT CO <sub>2</sub> E EMISSIONS, KG CO <sub>2</sub> E / TKM	0.0901
AVERAGE TRANSPORT DISTANCE, KM	320 km by lorry
CAPACITY UTILIZATION (INCLUDING EMPTY RETURN) %	100
VOLUME CAPACITY UTILIZATION FACTOR	=1
BULK DENSITY OF TRANSPORTED PRODUCTS (INCLUDING PACKAGING), KG/M <sup>3</sup>	
SOLID HARDWOOD BOARDS	563
SOLID SOFTWOOD BOARDS	462

### End of life scenario documentation

SCENARIO PARAMETER	SOLID HARDWOOD BOARDS	SOLID SOFTWOOD BOARDS
COLLECTION PROCESS – KG COLLECTED SEPARATELY	388	318
COLLECTION PROCESS – KG COLLECTED WITH MIXED WASTE	166	136
RECOVERY PROCESS – KG FOR RE-USE	0	0
RECOVERY PROCESS – KG FOR RECYCLING	192	157
RECOVERY PROCESS – KG FOR ENERGY RECOVERY	184	151
DISPOSAL (TOTAL) – KG FOR FINAL DEPOSITION	178	146
SCENARIO ASSUMPTIONS E.G. TRANSPORTATION	End-of-life product is transported 250 km with an average lorry	

### BIBLIOGRAPHY

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations. Principles and procedures.	Waste Framework Directive 2008/98/EC
ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.	RTS PCR (English version, 26.8.2020)
ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.	Wimex LCA background report. November 2022
ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services	Moreno Ruiz E., FitzGerald D., Symeonidis A., Ioannidou D., Sonderegger T., Dellenbach D. (2021). Müller J., Valsasina L., Vadenbo C., Minas N., Documentation of changes implemented in ecoinvent database v3. Association, Zürich, Switzerland.
Ecoinvent database v3.6 (2019) and One Click LCA database.	Borzecka M. (2018). Absorbing the Potential of Wood Waste in EU Regions and Industrial Bio-based Ecosystems – BioReg. European wood waste statistics report for recipient and model regions. IUNG-PIB
EN 15804:2012+A2:2019 Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.	Association of Issuing Bodies. Activity statistics. (2022) [ <a href="https://www.aib-net.org/facts/market-information/statistics/activity-statistics-all-aib-members">https://www.aib-net.org/facts/market-information/statistics/activity-statistics-all-aib-members</a> ]
EN 16485:2014 - Round and sawn timber - Environmental Product Declarations - Product category rules for wood and wood-based products for use in construction	Wind Europe. Wind energy in Europe. 2021 Statistics and the outlook for 2022-2026. February 2022 [ <a href="https://windeurope.org/intelligence-platform/product/wind-energy-in-europe-2021-statistics-and-the-outlook-for-2022-2026/">https://windeurope.org/intelligence-platform/product/wind-energy-in-europe-2021-statistics-and-the-outlook-for-2022-2026/</a> ]
EN 16449 Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide	Elering. (2022) Electricity consumption and production. [ <a href="https://elering.ee/en/electricity-consumption-and-production">https://elering.ee/en/electricity-consumption-and-production</a> ]
EN 350:2016 Durability of wood and wood-based products - Testing and classification of the durability to biological agents of wood and wood-based materials	

### OM LEVERANDØREN

Wimex er Danmarks førende leverandør af terrasse, hegn og facadebeklædninger. Vi leverer løsninger i termotræ, der sammensat med andre materialer giver et smukt og tidløst design til dit uderum, og samtidig er produceret af materialer med respekt for naturen.

Wimex termobasseret træ er helt naturligt, kun behandlet med varme og damp, er helt fri for kemikalier og har lang levetid.

For Wimex er det gode liv mindre praktik og mere tid til hygge, nærvær og afslapning.

Det gode liv er dage på terrassen med ens nærmeste.  
Dage der emmer af hygge og tid til at oplade batterierne.

Wimex levere rammerne, mens du lever det gode liv.

Framing Good Life.

## EPD AUTHOR AND CONTRIBUTORS

<b>MANUFACTURER</b>	WIMEX A/S
<b>EPD AUTHOR</b>	Mari Kirss Rangi Maja OÜ www.lcasupport.com
<b>EPD VERIFIER</b>	Sigita Židonienė, Vesta Consulting UAB www.vestaconsulting.lt
<b>EPD PROGRAM OPERATOR</b>	The Building Information Foundation RTS sr
<b>BACKGROUND DATA</b>	This EPD is based on Ecoinvent 3.6 (cut-off) and One Click LCA databases.
<b>LCA SOFTWARE</b>	The LCA and EPD have been created using One Click LCA Pre-Verified EPD Generator for Wood and plant-fibre based products

# Verification Statement

## VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with EN 15804, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The background report (project report) for this EPD

Why does verification transparency matter?

[Read more online.](#)

## VERIFICATION OVERVIEW

Following independent third party has verified this specific EPD:

EPD VERIFICATION INFORMATION	ANSWER
INDEPENDENT EPD VERIFIER RD-PARTY VERIFIER FOR EPD	Sigita Židonienė
EPD VERIFICATION STARTED ON	Date when started
EPD VERIFICATION COMPLETED ON	Date when completed
APPROVER OF THE EPD VERIFIER	The Building Information Foundation RTS sr
AUTHOR & TOOL VERIFICATION	ANSWER
EPD AUTHOR	Mari Kirss
EPD GENERATOR MODULE	Wood and plant-fibre based products
SOFTWARE VERIFICATION DATE	17 January 2021

## THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of

- the data collected and used in the LCA calculations,
- the way the LCA-based calculations have been carried out,
- the presentation of environmental data in the EPD, and
- other additional environmental information, as present

with respect to the procedural and methodological requirements in ISO 14025:2010 and EN 15804:2012+A2:2019.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Sigita Židonienė

## ANNEX 1 : ENVIRONMENTAL IMPACTS – EN 15804+A1. CML / ISO 21930

### SOLID HARDWOOD BOARDS

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GLOBAL WARMING POT.	kg CO <sub>2</sub> e	1.34E2	2.79E1	1.62E2	1.62E1	2.18E0	0E0	7.04E1	3.24E0	6.19E1	-1.06E2
OZONE DEPLETION POT.	kg CFC <sub>-11</sub> e	1.95E-5	1.58E-6	2.11E-5	3.06E-6	1.68E-7	0E0	1.22E-5	3.24E-7	5.84E-7	-1.25E-5
ACIDIFICATION	kg SO <sub>2</sub> e	5.39E-1	1.32E-1	6.71E-1	3.33E-2	3.19E-3	0E0	1.56E-1	1.56E-2	6.86E-2	-1E-1
EUTROPHICATION	kg PO <sub>4</sub> <sup>3-</sup> e	1.95E-1	4.68E-2	2.41E-1	6.73E-3	1.96E-3	0E0	3.73E-2	1.08E-2	3.51E-2	-1.28E-2
POCP (“SMOG”)	kg C <sub>2</sub> H <sub>4</sub> e	9.66E-2	8.07E-3	1.05E-1	2.11E-3	1.57E-4	0E0	1.02E-2	6.4E-4	8.85E-4	-2.42E-2
ADP-ELEMENTS	kg Sbe	3.05E-3	4.14E-4	3.46E-3	2.79E-4	4.67E-5	0E0	3.5E-3	1.28E-5	8.16E-5	-3.87E-4
ADP-FOSSIL	MJ	1.92E3	3.34E2	2.25E3	2.55E2	1.47E1	0E0	1.05E3	6.66E1	5.01E1	-1.79E3

### SOLID SOFTWOOD BOARDS

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GLOBAL WARMING POT.	kg CO <sub>2</sub> e	1.29E2	1.72E1	1.46E2	1.33E1	1.2E0	0E0	5.76E1	2.65E0	5.07E1	-8.48E1
OZONE DEPLETION POT.	kg CFC <sub>-11</sub> e	1.56E-5	1.16E-6	1.68E-5	2.51E-6	8.4E-9	0E0	9.96E-6	2.65E-7	4.78E-7	-9.86E-6
ACIDIFICATION	kg SO <sub>2</sub> e	6.24E-1	1.31E-1	7.55E-1	2.73E-2	5.06E-4	0E0	1.27E-1	1.28E-2	5.61E-2	-8.68E-2
EUTROPHICATION	kg PO <sub>4</sub> <sup>3-</sup> e	2.12E-1	4.32E-2	2.55E-1	5.52E-3	6.71E-4	0E0	3.05E-2	8.86E-3	2.87E-2	-6.62E-3
POCP (“SMOG”)	kg C <sub>2</sub> H <sub>4</sub> e	4.52E-2	7.81E-3	5.31E-2	1.73E-3	1.42E-5	0E0	8.32E-3	5.24E-4	7.24E-4	-1.04E-2
ADP-ELEMENTS	kg Sbe	2.33E-3	3.98E-4	2.73E-3	2.29E-4	1.47E-6	0E0	2.87E-3	1.05E-5	6.68E-5	-2.44E-4
ADP-FOSSIL	MJ	1.79E3	3E2	2.09E3	2.09E2	6.91E-1	0E0	8.61E2	5.45E1	4.1E1	-1.43E3

## ANNEX 2 : ENVIRONMENTAL IMPACTS – TRACI 2.1. / ISO 21930

### SOLID HARDWOOD BOARDS

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GLOBAL WARMING POT.	kg CO <sub>2</sub> e	1.33E2	2.79E1	1.6E2	1.62E1	2.18E0	0E0	7.03E1	3.24E0	6.19E1	-1.06E2
OZONE DEPLETION	kg CFC <sub>-11</sub> e	2.59E-5	2.06E-6	2.8E-5	4.08E-6	2.2E-7	0E0	1.62E-5	4.05E-7	6.55E-7	-1.73E-5
ACIDIFICATION	kg SO <sub>2</sub> e	7.6E-1	1.84E-1	9.44E-1	5.99E-2	4.68E-3	0E0	2.41E-1	1.49E-2	3.95E-2	-1.35E-1
EUTROPHICATION	kg Ne	1.85E-1	1.82E-2	2.04E-1	8.42E-3	9.96E-4	0E0	3.49E-2	2.88E-3	9.16E-3	-2.44E-2
POCP (“SMOG”)	kg O <sub>3</sub> e	1.78E1	3.55E0	2.13E1	1.31E0	1.08E-1	0E0	4.73E0	1.5E-1	1.07E0	-2.99E0
ADP-FOSSIL	MJ	2.38E2	4.2E1	2.8E2	3.65E1	2.03E0	0E0	1.46E2	2.57E0	6.41E0	-2.9E2


### SOLID SOFTWOOD BOARDS

IMPACT CATEGORY	UNIT	A1-A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GLOBAL WARMING POT.	kg CO <sub>2</sub> e	1.28E2	1.73E1	1.46E2	1.33E1	1.2E0	0E0	5.75E1	2.66E0	5.07E1	-8.5E1
OZONE DEPLETION	kg CFC <sub>-11</sub> e	2.08E-5	1.52E-6	2.24E-5	3.34E-6	8.77E-9	0E0	1.32E-5	3.32E-7	5.36E-7	-1.37E-5
ACIDIFICATION	kg SO <sub>2</sub> e	8.29E-1	1.69E-1	9.98E-1	4.91E-2	6.81E-4	0E0	1.97E-1	1.22E-2	3.24E-2	-1.09E-1
EUTROPHICATION	kg Ne	1.28E-1	1.58E-2	1.44E-1	6.91E-3	1.69E-4	0E0	2.86E-2	2.36E-3	7.5E-3	-8.02E-3
POCP (“SMOG”)	kg O <sub>3</sub> e	1.92E1	2.98E0	2.22E1	1.08E0	1.87E-2	0E0	3.88E0	1.23E-1	8.75E-1	-2.4E0
ADP-FOSSIL	MJ	1.97E2	3.71E1	2.35E2	2.99E1	8.56E-2	0E0	1.19E2	2.1E0	5.25E0	-2.33E2

**ANNEX 3 : LIFE-CYCLE ASSESSMENT RESULT VISUALIZATION**

**GLOBAL WARMING POTENTIAL FOSSIL KG CO<sub>2</sub>E – LIFE-CYCLE STAGES**

**Solid hardwood boards**

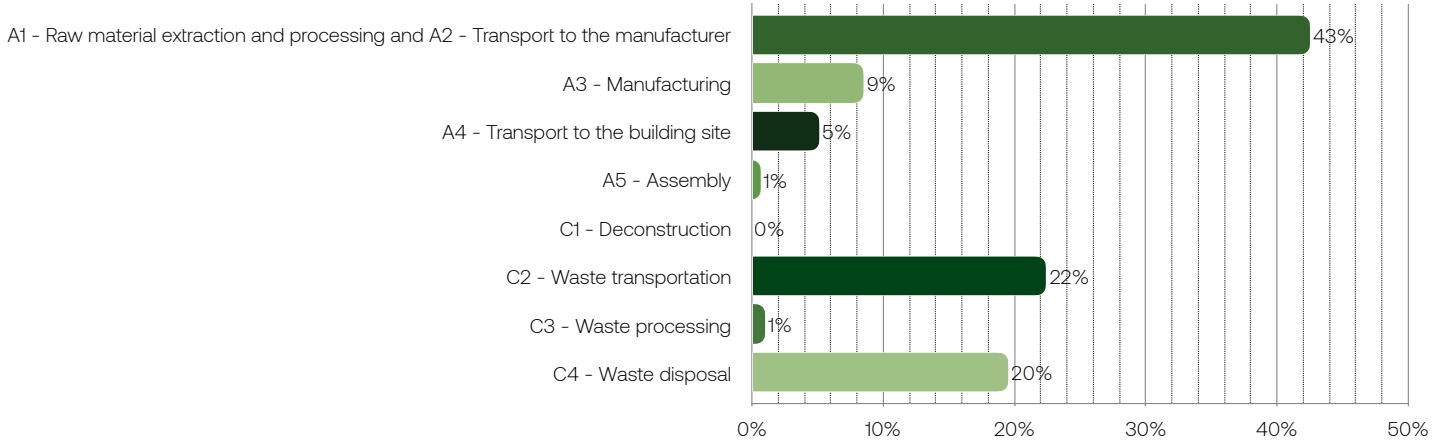

**Solid softwood boards**

